


Automotive / Appliance control - sensor

9 mm carbon potentiometer CA9

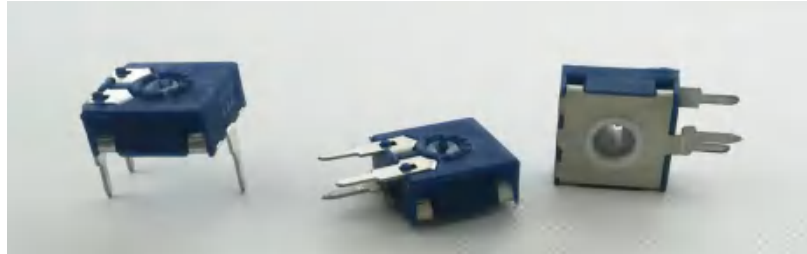

Mechanical specifications

Mechanical rotation angle	235° ± 10°
Torque	rotational 10~80gf.cm 400gf.cm min
Life	up to 10K cycles

Electrical specifications

Range of values ¹	1KΩ ≤ Rn ≤ 2MΩ
Standard tolerance	± 20%
Max. voltage	200 VDC
Rating power 70°C	0.15 W
Taper	Reverse log , Linear , Log
Residual resistance	≤ 10 Ω
Slider noise	≤ 68mV
Operating temperature ²	-10°C to +70°C

¹ Others: check availability. ² Up to 85°C depending on application.

Materials

Driving plate&Housing	PA6 (Fammability rating: HB)
Terminals	Tinned steel strip
Reed	Tin bronze

Features

- Carbon resistive element.
- Dust proof enclosure.
- Nnloy substrate
- Wiper positioned at initial, 50% or fully clockwise.
- * ROHS compliant


Applications

Typical applications include test and measurement equipment, consumer electronics, appliances, small engines, robotics, motion controllers, and medical equipment control panels.


Automotive / Appliance control - sensor

9 mm carbon potentiometer CA9


How to order

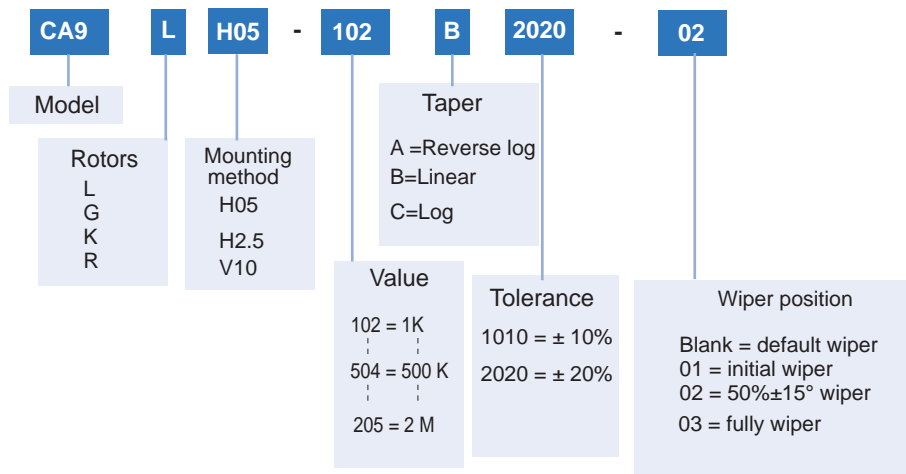

Recommended connections

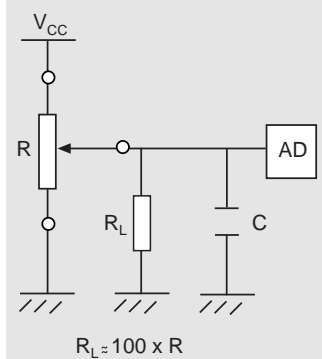

Power rating curve



How to order examples

CA9LH05 -103B2020

9mm potentiometer with rotor "L" (arrow shape) , "H05"Mounting methods (vertical mounting – horizontal adjustment) , 10K value and 20% resistive tolerance ,default wiper.

Standard values - tolerances

Resistance Ω	1K	2K	5K	10K	20K	25K	50K	100K	200K	250K	500K	1M	2M
How to order code	102	202	502	103	203	253	503	104	204	254	504	105	205
Standard tolerance	20%												

Tests


Mechanical life (cycles)	1000 @ 10 CPM ...15 CPM
Temperature coefficient	-10°C to+70°C
Heat resistance	16 h. @ 85°C
Moisture resistance	96 h. @ 40°C @ 95% HR

Soldering condition

Wave soldering	Max 260°C , within 5 second
Manual soldering	Max 300°C , within 3 second


Automotive / Appliance control - sensor

9mm carbon potentiometer CA9



Rotors (Wipers are shown positioned at 50% for the picture)

Without shaft or knob.

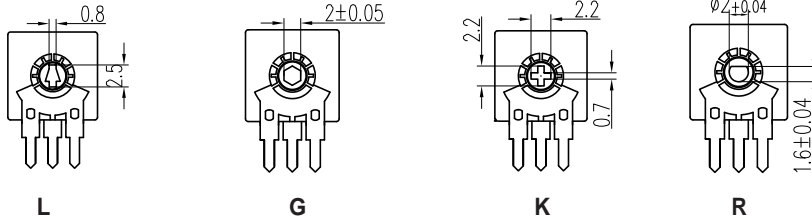


All rotors are thru-hole.

General tolerance



Dimension: Less than 10±0.3mm
 Above 10~30±0.5mm
 Above 30~100±1mm
 Angle: Above ___±5°

Mounting methods. Dimensions

V = horizontal mounting – vertical adjustment

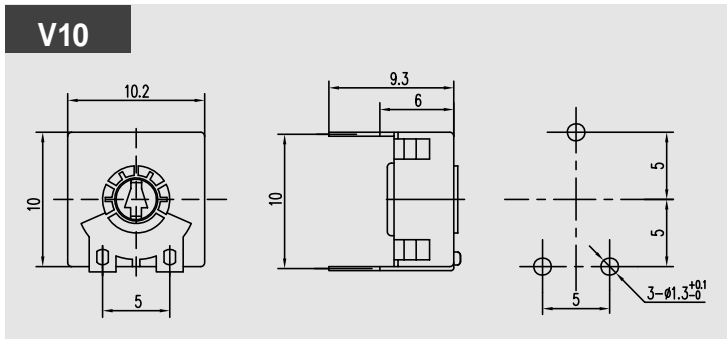


H = vertical mounting – horizontal adjustment

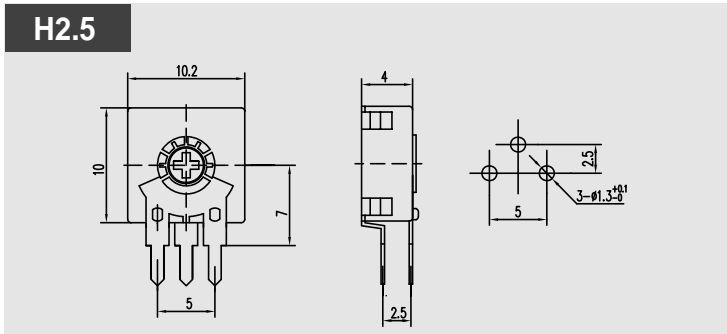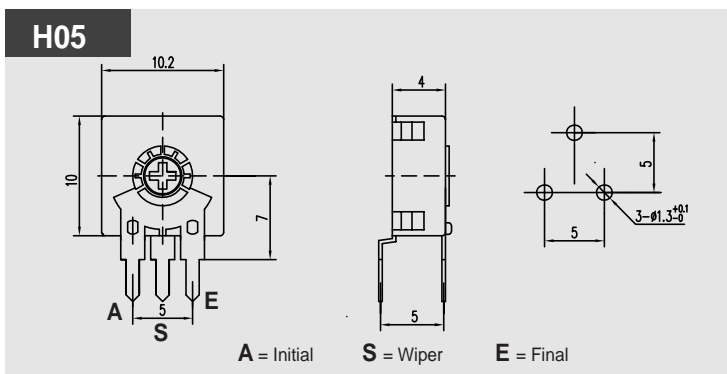


Tapers

TAPERS (A) SERIES

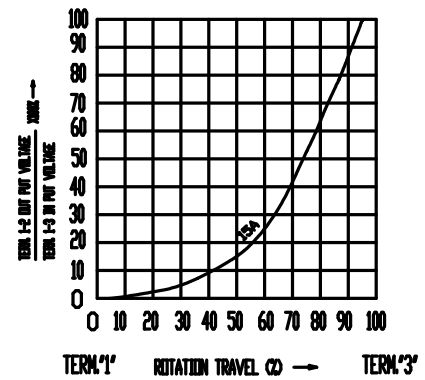

TAPERS (B) SERIES

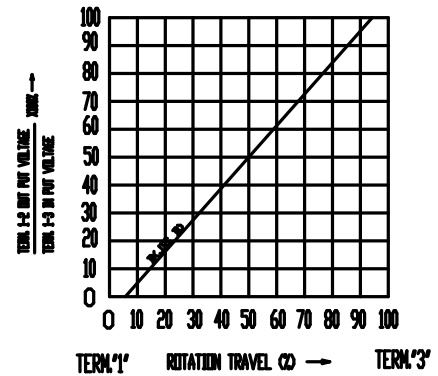

TAPERS (C) SERIES

